

THIRD-ORDER LEVELING
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY


old 184
35-079-44
RANDEMAN QUADRANGLE
180 NORTH CAROLINA
N3545-W7945/15
DIAGRAM NI 17-3
RALEIGH

Guilford and Randolph Counties, North Carolina

Final adjustment of 1974

Edition of 1/16/75 - see 9/8/75

PR: WSM/rmc

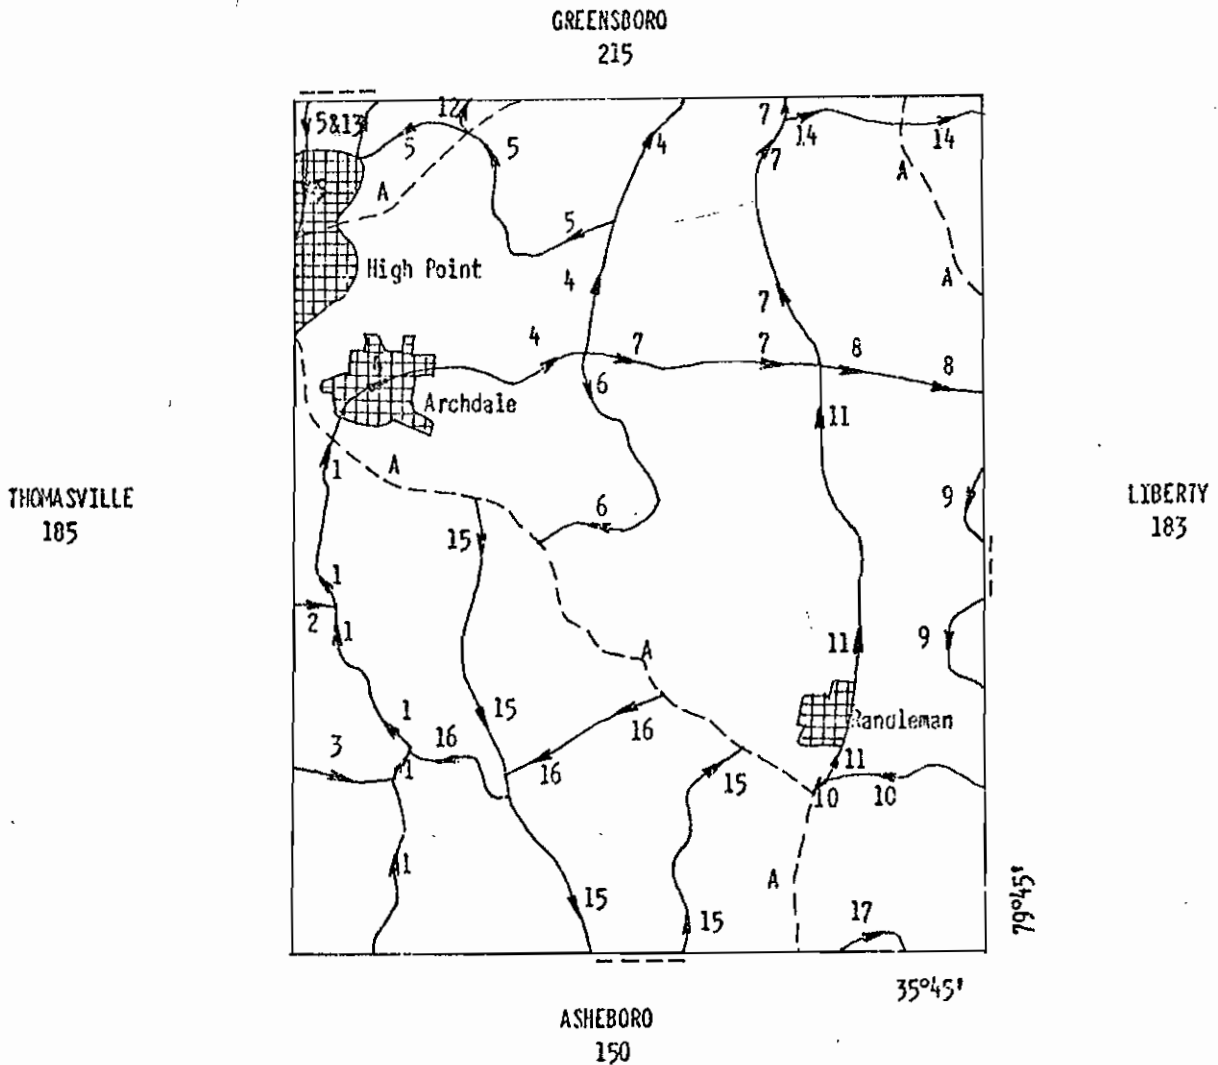

NGS (USC&GS) VERTICAL CONTROL DATA

A. Quadrangle 350794

NGVD 29
Elevations

INDEX OF PERMANENT MARKS

<u>MARK (USGS)</u>	<u>PAGE NO.</u>	<u>MARK (USGS)</u>	<u>PAGE NO.</u>
TT 56 HF 1948 - <i>N.F. 1949</i>	12	197 WSM 1949 813	9
TT 59 HF 1948 671	3	WV 32 1949 846	10
TT 60 HF 1948 679	3,4,11	1 JEM 1951 756	10
TT 61 HF 1948 720 - <i>Good 1987</i>	3	2 JEM 1951 745	10
TT 62 HF 1948 712	3,3	3 JEM 1951 705	10,11
TT 63 HF 1948 782	3	4 JEM 1951 494	10
TT 64 HF 1948 860	3,4	7 JEM 1951 644	11
164 WSM 1949 493	3	8 JEM 1951 RESCT 1959	11
165 WSM 1949 846	4	9 JEM 1951 689	11
166 WSM 1949 817	4		
167 WSM 1949 801	4,6,7	<u>NGS AND STATE SURVEY</u>	
168 WSM 1948 779	4	NC 82	8
169 WSM 1949 826	4,5	NC 89	7,10
170 WSM 1949 822	4	AZIMUTH MARK NC 89	10
171 WSM 1949 692	5	NC 637 AZIMUTH MARK	5
172 WSM 1949 818	5		
173 WSM 1949 748	5	<u>NGS</u>	
174 WSM 1949 898	5	J 154 1935	5,9
175 WSM 1949 844	6	R 11 1935	10
176 WSM 1949 811	6	S 91 1935	9
177 WSM 1949 791	6	U 91 1935	11
178 WSM 1949 684	6	V 91 1935	11
179 WSM 1949 677	7	Y 91 1935	10
180 WSM 1949 798	7	Z 91 1935	3,4
181 WSM 1949 812	7,7	GLENOLA 1948	6
182 WSM 1949 838	7	GLENOLA 1948 (AZI. MK)	6
183 WSM 1949 866	7	GLENOLA NO 1 1948	6
184 WSM 1949 714	7	GLENOLA NO 2 1948	6
187 WSM 1949 743	8	TRADING PATH 1948	8
189 WSM 1949 744	8	TRADING PATH NO 1 1948	6
192 WSM 1949 619	8	TRADING PATH NO 2 1948	8
193 WSM 1949 755	8,9		
194 WSM 1949 706	9		
195 WSM 1949 639	9		
196 WSM 1949 806	9		

1949

LINE 1.

Feet

By Wayne S. Monk, 1949; Book AV 136

Polar Ridge Church, 2.1 mi S. of, 150 ft NE. of Mt. Pleasant Methodist Church, 47 ft N. and 10 ft W. of crossroads, in concrete post; standard tablet stamped "TT 59 1948 671" (Not found, 1970) 671.412

Reference mark; 40 ft SW. of tablet; in root on E. side of 7-in. oak tree; copper nail and washer 672.05

Polar Ridge Church, 400 ft N. of; 87 ft NW. of NW. corner of Polar Ridge School, 26 ft E. of centerline of macadam rd., in concrete post; standard tablet stamped "TT 60 HF 1948 679" (Not found, 1970) 678.619

Reference mark; 120 ft SW. of tablet; 18 ft W. of rd., in root on SE. side of 9-in. oak tree; copper nail and washer 680.75

Polar Ridge Church, 2.9 mi NW. of; 5.1 mi S. of Trinity High School; 2 ft N. and 41 ft E. of rd., forks; 64 ft S. of 30-in. oak tree in concrete post; standard tablet stamped "TT 61 HF 1948 720" (Not found, 1970) 719.987

Reference mark; 64 ft N. of tablet; in root on W. side of 30-in. oak tree; copper nail and washer 720.40

Trinity High School, 3.3 mi S. of, 0.3 mi N. of Liberty Grove Church, 30 ft S. and 18 ft W. of T-rd. fork, 20 ft NE. of 20-in. oak tree in concrete post; standard tablet stamped "TT 62 HF 1948 732" 712.225

Reference mark; 20 ft SW. of tablet; in root on NW. side of 20-in. oak tree; copper nail and washer 712.27

Trinity High School, 1.1 mi S. of, 75 ft SW. of Jordan's grocery store, 19 ft W. of centerline of macadam rd., 5 ft N. of power pole, in concrete post; standard tablet stamped "TT 63 HF 1948 782" (Not found, 1970) 781.761

Trinity High School, 0.8 mi NE. of, RR. crossing, 35 ft N. and 3 ft W. of grade crossing, 20 ft NW. of centerline of State Highway 62, 4 ft W. of RR. signal light, 3 ft S. of power pole in concrete post; standard tablet stamped "TT 64 HF 1948 860" * NGS READJUSTED 262.076 859.904 262.076

Reference mark; 4 ft E. of tablet; on concrete base for RR. signal light; chiseled square 860.24

"2 91 1935" (NGS) 825.550

LINE 2.

By Wayne S. Monk, 1949; Book AV 136

"TT 62 HF 1948 612" (Described in line 1) 712.225

NGVD 29
Elevations

LINE 3.

By Wayne S. Monk, 1949; Book AV 136

Polar Ridge Church, 2.2 mi W. of, 20 ft S. and 60 ft E. of crossing of Uwharrie River, 30 ft SE. of SE. end of bridge, in large rock; standard tablet stamped "164 WSM 1949 493" (Not found, 1970) 492.780

LINE 3 (Cont'd)Feet

"TT 60 HF 1948 679" (Described in line 1)

678.619

LINE 4.

By Wayne S. Monk, 1949; Book AV 136

"Z 91 1935" (NGS) (Also in line 1)

825.550

"TT 64 HF 1948 860" (Described in line 1)

859.904

Trinity High School, 2.6 mi NE. of, along State Highway 62; 3.4 mi S. and 4.6 mi E. of High Point Post Office; 30 ft S. and 125 ft E. of junction of State Highway 62 and rd. N. to Allen Jay Baptist Church, 3 ft E. of marker for Randolph-Guilford County line, in concrete post; standard tablet stamped "165 WSM 1949 846"

846.197

Reference mark; 95 ft E. of tablet; in root on NE. side of 12-in. oak tree; rail spike

842.37

Trinity High School, 4.5 mi NE. of, along State Highway 62, 20 ft N. and 25 ft W. of junction of hwy. and rd. N. to Pine Grove Baptist Church, in concrete post; standard tablet stamped "166 WSM 1949 817"

816.981

Reference mark; 25 ft N. of tablet; in root on NE. side of 10-in. oak tree; rail spike

816.47

Trinity High School, 6.6 mi NE. of, along State Highway 62, 3.4 mi S. and 4.6 mi E. of High Point Post Office, 5.1 mi SW. of Groomtown, 25 ft S. and 150 ft W. of junction of State Highway 62 and Groomtown Road 150 ft S. of W. end of store, in concrete post; standard tablet stamped "167 WSM 1949 801"

800.934

Reference mark, 20 ft W. of tablet, in root on N. side of 20-in. oak tree; rail spike

801.90

U.E., Groomtown, 4.2 mi SW. of, NW. end of small steel girder bridge over creek, on concrete abutment; chiseled square

681.54

Groomtown, 3.6 mi S. of along rd. S. to State Highway 62, 0.6 mi N. of creek, 35 ft N. and 40 ft E. of crossroads, in concrete post; standard tablet stamped "168 WSM 1949 779" (Reported destroyed, 1970)

778.525

Reference mark, 15 ft N. of tablet, in root on S. side of 10-in. oak tree, rail spike

777.96

U.E., Groomtown, 3.1 mi SW. of, SW. end of wooden bridge, 200 ft S. of T-rd. E., on concrete abutment; chiseled square

708.98

Groomtown, 1.8 mi S. of along rd. S. to State Highway 62, 0.2 mi N. of crossroads, at crossing of high tension line, 50 ft E. of rd. N., under center of tower N. 79, in concrete post; standard tablet stamped "169 WSM 1949 826" /

826.273

Reference mark, 120 ft S. of tablet, on center of concrete headwall of culvert; chiseled square

823.09

Groomtown, 25 ft S. and 50 ft E. of crossroads, 8 ft S. of power pole, in concrete post; standard tablet stamped "170 WSM 1949 822"

822.091

LINE 4 (Cont'd)Feet

Reference mark, 30 ft S. of tablet, in root on SW. side of 10-in. oak tree; rail spike 822.66

LINE 5.

By Wayne S. Monk, 1949; Book AV 136

"169 WSM 1949 826" (Described in line 4) 826.273

U.E., Groomtown, 1.8 mi S. thence 0.7 mi SW. of, SE. end of concrete bridge over Register Creek, on concrete abutment; chiseled square 723.76

Groomtown, 2.0 mi S. of, thence 1.8 mi W., 3.9 mi SE. of Jamestown, at NW. end of steel girder bridge over Deep River, in NW. concrete abutment; standard tablet stamped "171 WSM 1949 692" 692.155

Reference mark, 100 ft E. of tablet, on NE. concrete abutment, chiseled square 692.36

Jamestown, 3.0 mi SE. of, at junction of Kivett Road and sand-clay rd. leading S. to Freeman's Mill, 24 ft N. of centerline of Kivett Road, 131 ft SW. of SW. corner of residence, and 114 ft NW. of NE. corner of a service station; NGS and State Survey standard disk stamped "NC 637 AZIMUTH MARK" 827.560

Jamestown, 1.9 mi S. of, 130 ft N. and 25 ft E. of junction of rd. SE. to Freeman's Mill and rd. N. to Jamestown, 150 ft S. of S. end of gas pumps, 2 ft S. of power pole N. 28, in concrete post; standard tablet stamped "172 WSM 1949 813" 817.830

Reference mark, 70 ft SW. of tablet, in root on NW. side of 7-in. oak tree; copper nail and washer 817.45

U.E., Jamestown, 1.1 mi SE. of, SE. end of steel girder bridge over Deep River, on concrete abutment; chiseled square 709.14

"J 154 1935" (NGS) 775.487

Jamestown, at NW. end of concrete bridge over Deep River, 25 ft N. of centerline of U. S. Highway 29-70, in concrete abutment; standard tablet stamped "173 WSM 1949 748" 747.812

Reference mark, 165 ft W. of tablet, on concrete abutment; chiseled square 747.81

Jamestown, 2.8 mi SW. of along U. S. Highway 29-70, at High Point, at SW. corner of Penny Hall High Point College, 60 ft N. and 30 ft E. of junction of hwy. and rd. N., 3.0 ft S. of power pole, in concrete post; standard tablet stamped "174 WSM 1949 898" (Not found, 1967) 898.526

Reference mark, 85 ft W. of tablet, in root on N. side of 12-in. maple tree; copper nail and washer 901.26

U.E., High Point, Penny Hall College, 1.0 mi N. of, at SW. end of concrete bridge over creek, 110 ft S. S. of junction of rd. W., on concrete abutment, chiseled square 773.22

[.bgs into Greensboro quadrangle]

LINE 5 (Cont'd)feet

- High Point, Penny Hall College, 1.0 mi N. of, thence 1.2 mi NW., 100 ft E. and 20 ft N. of junction of State Highway 68 and rd. SE., 3.0 ft S. of power pole N. L A 56, in concrete post; standard tablet stamped "175 WSM 1949 844" 843.935
- Reference mark, 45 ft E. of tablet, in root on S. side of 8-in. pine tree; copper nail and washer 843.84
- U.E., High Point, 2.5 mi N. of station, at junction of U. S. Highway 68 and Centennial Avenue extension, on center of concrete base of Texaco gas pump stand; chiseled square 885.983

LINE 6.

By Wayne S. Monk, 1949; Book AV 136

- "167 WSM 1949 801" (Described in line 4) 800.934
- U.E., High Point, 3.4 mi S. of thence 5.7 mi E. along State Highway 62, thence 0.2 mi S., of SW. end of wooden bridge over creek, on concrete abutment, chiseled square 701.61
- High Point, 3.4 mi S. of, thence 5.7 mi E. along State Highway 62, thence 1.3 mi S. at Deep River Tabernacle, 25 ft N. and 35 ft W. of rd. junction; 2 ft W. of power pole N. E Q 28, in concrete post; standard tablet stamped "176 WSM 1949 811" 811.032
- Reference mark, 40 ft S. of tablet, in root on NW. side of 7-in. oak tree; copper nail and washer 810.91
- Glenola, 2.2 mi E. of, thence 0.9 mi NE. of, at Cedar Square Friends Church, 130 ft SE. of SE. corner of church, 55 ft N. and 320 ft W. of crossroads, in concrete post; standard tablet stamped "177 WSM 1949 791" (Reported not found, 1970) 791.184
- Reference mark, 12 ft N. of tablet, in root on SE. side of 12-in. oak tree; copper nail and washer 791.44
- Glenola, 2.2 mi E. of, at NW. end of wooden bridge over Muddy Creek, in concrete headwall; standard tablet stamped "178 WSM 1949 684" 684.181
- Reference mark, 120 ft S. of tablet, on concrete headwall; chiseled square 681.71
- Glenola, 0.5 mi SE. of, in angle formed by U. S. Highway 311 and gravel rd., 216 ft SW. of road junction, 47 ft W. of center of hwy. and 70 ft E. of center of rd., in concrete post projecting about 2 in.; NGS standard triangulation station disk stamped "GLENOLA 1948" 799.422
- Reference mark No. 1; 58 ft SE. of station, 22 ft W. of center of hwy. and 9 ft S. of powerline pole, in concrete post flush with ground; NGS standard reference mark disk stamped "GLENOLA NO 1 1948" 800.864
- Reference mark No. 2, 98 ft SW. of station, 27 ft W. of dirt rd. and 5 ft E. of E. rail of RR., in concrete post projecting about 2 in.; NGS standard reference mark disk stamped "GLENOLA NO 2 1948" 798.947
- Azimuth mark, 0.3 mi NW. of station, 55 ft N. of telephone pole, 22 ft E. of center of U. S. Highway 311, 2 ft S. of white witness post; in concrete post flush with ground; NGS standard azimuth mark disk stamped "GLENOLA 1948" 794.823

1949

LINE 7.

Feet

By Wayne S. Monk, 1949; Book AV 136 a

"167 WSM 1949 801" (Described in line 4) (Also in line 6) 800.934

High Point Post Office, 3.4 mi S. thence 6.6 mi E. of along State Highway 62, at SW. end of concrete bridge over Deep River, in concrete abutment; standard tablet stamped "179 WSM 1949 677" 677.461

Reference mark, 200 ft E. of tablet, on SE. concrete abutment, chiseled square 677.46

High Point Post Office, 3.4 mi S. of, thence 8.2 mi E. along State Highway 62, 1.8 mi S. and 0.5 mi E. of of Burnetts Chapel, 40 ft S. and 33 ft E. of junction of rd. S. and State Highway 62, 3.0 ft N. of power pole No. V 6, in concrete post; standard tablet stamped "180 WSM 1949 798" (Reported not found, 1970) 798.277

Burnetts Chapel, 1.3 mi SE. of 0.5 mi N. of junction of U. S. Highway 220 and State Highway 62, 40 ft N. and 30 ft E. of junction of highway and rd. NW., 3.0 ft S. of power pole C.R. 150, in concrete post; standard tablet stamped "181 WSM 1949 812" (Reported destroyed, 1970) 812.287

Reference mark, 220 ft NW. of tablet; 230 ft N. and 35 ft W. of road junction, in root on SW. side of 10-in. twin-oak tree; copper nail and washer 812.40

Burnetts Chapel, 0.5 mi N. of, 55 ft N. and 32 ft E. of junction of rd. N. to Concord Friends Church and rd. E. to U. S. Highway 220, 3.0 ft S. of power pole, in concrete post; standard tablet stamped "182 WSM 1949 838" 838.389

Burnetts Chapel, 2.6 mi N. of, at Concord Friends Church, 75 ft S. of SE. corner of church, 30 ft N. and 30 ft W. of rd. junction, in concrete post; standard tablet stamped "183 WSM 1949 866" 865.905

Reference mark, 15 ft N. of tablet, in root on SW. side of 10-in. oak tree; copper nail and washer 865.92

Groomtown, 3.0 mi E. of 0.2 mi W. of U. S. Highway 220 along County Road 71, on top of bank, 19 ft S. of centerline of Road 71, 211 ft SE. of 12-in. oak tree; 157 ft SW. of 12-in. oak tree, in concrete post; NGS and State Survey standard disk designated "NC 89" 861.521

LINE 8.

By Wayne S. Monk, 1949; Book AV 136 a

"181 WSM 812 1949" (Described in line 7) 812.287

Burnetts Chapel, 1.8 mi SE. of, thence 0.8 mi E. along State Highway 62, at SE. end of concrete bridge over Polecat Creek, in concrete abutment; standard tablet stamped "184 WSM 1949 714" 714.304

Reference mark, 80 ft W. of tablet, on SW. concrete abutment; chiseled square 713.10

U.E., Burnetts Chapel, 1.8 mi SE. of, thence 1.6 mi E. along State Highway 62, 20 ft S. and 75 ft E. of crossroads, on center of concrete headwall of culvert; chiseled square 785.10

LINE 8 (Cont'd)Feet

Burnetts Chapel, 1.8 mi SE. of, thence 2.6 mi E. along State Highway 62, about 149 ft E. of I-rd. N., 33.0 ft S. of centerline of hwy., 55 ft NE. of 18-in. white-oak tree, 44 ft NW. of 12-in. white-oak tree, in concrete post; NGS and State Survey standard disk stamped "NC 82" 790.195

Reference mark, 200 ft W. of tablet, in root on N. side of 12-in. pine tree; copper nail and washer 791.45

LINE 9.

By Wayne S. Monk, 1949; Book AV 135 a

Climax, 1.1 mi W. along State Highway 62, thence 3.0 mi SW. along Climax-Salem Road, 70 ft S. and 32 ft W. of crossroads, in concrete post; standard tablet stamped "187 WSM 1949 743" (Reported not found, 1970) 743.197

Reference mark, 5 ft S. of tablet, in root on SE. side of 7-in. oak tree; copper nail and washer 742.78

[Jogs into Staley quadrangle]

Salem, 1.2 mi NE. along Salem-Red Cross Road, 500 ft S. and 30 ft W. of junction of Salem-Red Cross rd. and rd. SE. to Millboro 60 ft W. of R.E.A. pole No. 3-33, in concrete post; standard tablet stamped "189 WSM 1949 744" 743.585

Reference mark, 5 ft N. of tablet, in root on N. side of 12-in. oak tree; copper nail and washer 743.49

LINE 10.

By Wayne S. Monk, 1949; Book AV 136 a

Millboro, 1.8 mi W. of ; at Worthville, 20 ft S. of rd., 320 ft E. of centerline of crossing Deep River, in rock boulder; standard tablet stamped "192 WSM 1949 619" (Tied by NGS, 1971) 619.093

Reference mark, 40 ft W. of tablet, on E. end of S. concrete headwall of culvert; chiseled square 612.33

Randleman, 1.0 mi S. of, 1.5 mi W. of Worthville, Methodist Church; 30 ft W. of centerline of U. S. Highway 220; in centerline with I-rd. E. to Millboro; in concrete post; standard tablet stamped "193 WSM 1949 753" 752.770

Reference mark, 160 ft S. of tablet, in root on SE. side of 12-in. oak tree; copper nail and washer 754.52

Randleman, 2 mi S. of, at junction of U. S. Highways 220 and 311, on property owned by Mrs. Henry Ingram, 85 ft W. of center of U. S. Highway 220; 6.5 ft S. of white witness post; NGS standard triangulation station disk stamped "TRADING PATH 1948" 779.171

Reference mark, No. 1, 86.47 ft S. of station, 65 ft E. of center of U. S. Highway 220, 3 ft NE. of 8-in. hickory tree, mark projecting 3 in.; NGS standard reference disk stamped "TRADING PATH NO 1 1948" 780.737

Reference mark No. 2, 113.90 ft W. of station, near S. boundary of island formed by two highways, 28 ft W. of center of U. S. Highway 220, mark is flush; NGS standard reference disk stamped "TRADING PATH NO 2 1948" 777.650

LINE 10 (Cont'd)Feet

"S 91 1935" (NGS)

760.484

LINE 11.

By Wayne S. Monk, 1949; Book AV 136

"193 WSM 1949 753" (Described in line 10)

752.770

U.E., Randleman, at SE. end of concrete bridge over Deep River, on concrete abutment; chiseled square

634.75

Randleman, 0.4 mi N. of crossing of Deep River, 65 ft SE. of centerline of U. S. Highway 220, at SW. leg of water tank, in concrete foundation; standard tablet stamped "194 WSM 1949 706"

705.906

Reference mark, 15 ft N. of tablet, on concrete foundation at water tank; chiseled square

705.88

Randleman, crossing of Deep River on U. S. Highway 220, 2.1 mi N. of along Randleman-Walker's Mill Road, 120 ft S. and 25 ft W. of junction of Walker's Mill rd. and rd. N. to Level Cross, 5 ft S. of 19-in. maple tree, in concrete post; standard tablet stamped "195 WSM 1949 639" (Reported not found, 1970)

638.846

Reference mark, 5 ft N. of tablet, in root on E. side of 19-in. maple tree; copper nail and washer

638.65

Randleman, crossing of Deep River on U. S. Highway 220, 4.7 mi N. of along Randleman-Walker's Mill-Level Cross Road, at Level Cross, 80 ft S. and 30 ft E. of crossroads, 2 ft N. of power pole No. CBFC 31, in concrete post; standard tablet stamped "196 WSM 1949 806" (Reported not found, 1970)

805.917

Reference mark, 75 ft SW. of tablet, in root on E. side of 20-in. oak tree; copper nail and washer

803.46

Level Cross, ^{SR 2101} 1.5 mi N. of, along U. S. Highway 220, 40 ft S. and 50 ft E. of junction of hwy. and Glenola Road, 2 ft N. of power pole N. CB 114, in concrete post; standard tablet stamped "197 WSM 1949 813"

SR 1938

813.738

Reference mark, 70 ft NE. of tablet, in root on W. side of 5-in. pine tree; copper nail and washer

813.08

U. E., Level Cross, 2.3 mi N. of, along U. S. Highway 220, 0.6 mi S. of intersection of U. S. Highway 220 and State Highway 62, 25 ft S. and 25 ft E. of E. junction of hwy. and drive E. on center of headwall of culvert; chiseled square

784.99

LINE 12.

By Wallace Varley, 1949; Book AV 142

"J 154 1935" (NGS)

775.487

LINE 13.

By Wallace Varley, 1949; Book AV 142

High Point, 2.5 mi N. of station, junction of U. S. Highway 68 and Centennial Avenue extension, in center of concrete base of Texaco gas pump stand; chiseled square

885.98

LINE 13 (Cont'd)

Feet

- High Point Railway Station, 1.3 mi N. of, along Centennial Avenue, about 0.3 mi S. of junction of Centennial Avenue and U. S. Highway 29-70, at sidewalk bridge over small stream midway between two dirt rds., 25 ft W. of centerline of Centennial Avenue, 9.3 ft W. of curb, 22.1 ft SW. of powerline pole 50, in NW. corner of bridge; standard tablet stamped "WV 32 1949 846"
845.602
- Reference mark, 19.2 ft S. of tabet, 23.8 ft W. of centerline of Centennial Avenue, in SW. corner of bridge; chiseled square
846.08

LINE 14.

By Wallace Varley, 1949; Book AV 142 a

- "NC 89" (NGS and State Survey) (Described in line 7)
861.521
- Reference mark, 0.2 mi E. of station, 10.5 ft E. of paving, at junction of U. S. Highway 220 and county road 71 W., in concrete post; NGS and State Survey standard disk stamped "AZIMUTH MARK NC 89"
861.464
- "R 11 1935" (NGS)
842.912

LINE 15.

J. E. McClane, 1951; Book AV 242 a

NGVD 29
Elevations

- "V 91 1935" (NGS)
822.830
- Flint Hill, 4.0 mi N. of, along black-top rd. leading into U. S. Highway 311, 30 ft S. and 27 ft W. and level with centerline of rd. at T-rd. W., 280 ft E. of school, in concrete headwall; standard tablet stamped "1 JEM 1951 756"
756.149
- Reference mark, 4 ft N. of tablet, on N. end of headwall; chiseled square
756.04
- Flint Hill, 1.9 mi N. of, along black-top rd. leading into U. S. Highway 311, 90 ft S. , 21 ft E. of and about 2 ft higher than intersection of crossroads, 5 ft E. of group of mailboxes, in concrete post; standard tablet stamped "2 JEM 1951 745"
745.063
- Reference mark, 8 1/4 ft N. of tablet, on N. end of 12-in. concrete pipe; chiseled square
741.62
- Flint Hill; 105 ft W. of D. W. Canoy's store; 45 ft S., 33 ft W. and level with centerline of black-top rd. at T-rd. E.; 4 ft N. of mailboxes; in concrete post; standard tablet stamped "3 JEM 1951 705"
705.364
- Reference mark, 166 ft NE. of tablet; in W. base of 40-in. oak tree; copper nail and washer
705.00
- Flint Hill, 2.7 mi S. of, along Mountain Road, at steel truss bridge over Caraway Creek, 12 ft E. and level with centerline of rd. at S. end of bridge, on SE. wingwall flush with concrete post; standard tablet stamped "4 JEM 1951 494"
493.995

OVER
FOR 12LINE 15 (Cont'd)Feet

Reference mark, 72 ft N. of tablet, on lower section of NE. wingwall; chiseled square	493.25
[Jogs into Ashboro quadrangle]	
Ashboro, 3.0 mi NW. of along U. S. Highway 64, thence 1.7 mi N. along gravel rd.; 5.4 mi S. of Sophia; 18 ft E. of and 2 ft higher than centerline of I-woods rd. E.; in concrete post; standard tablet stamped "7 JEM 1951 644"	633.259
Reference mark, 40 ft N. of tablet; on E. end of 18-in. concrete tile culvert; chiseled square	629.20
U.E., Sophia, 4.4 mi S. of, 12 ft W. and 2 ft lower than centerline of rd. at drain W., on end of 20-in. concrete pipe culvert; chiseled square	653.62
Sophia, 3.0 mi S. of, along paved rd.; 28 ft W. of, and 1 ft lower than junction of Y-rd. NW.; 2 ft E. of Duke Power Pole; in concrete post; standard tablet stamped "8 JEM 1951 RESET 1959"	687.460
U.E., Sophia, about 1.7 mi S. of, 66 ft S., 66 ft W. and about 3 ft lower than centerline of rd. at private drive NW., on SE. end of concrete pipe culvert; chiseled square	728.55
"U 91 1935" (NGS)	791.668

LINE:16.

E. McClane, 1951; Book 242 a	
"W 91 1935" (NGS)	800.792
U.E., Flint Hill, 2.9 mi NE. of, 8 ft S., 12 ft E. and level with centerline of rd. at drain crossing, on SE. end of 18-in. concrete pipe culvert; chiseled square	717.16
Flint Hill, 1.5 mi NE. of, along graveled rd., 18 ft N. and 24 ft W. and level with intersection of I-rd. NW., 4 ft NW. of rd. signpost; in concrete post; standard tablet stamped "9 JEM 1951 689" (Reported destroyed, 1966)	689.216
Reference mark, 36 ft S. of tablet, in root on S. side of 36-in. hickory tree; copper nail and washer	689.59
"3 JEM 1951 705" (Described in line 15)	705.364
U.E., Flint Hill, 1.4 mi W. of, 12 ft N., 400 ft E. and about 7 ft higher than centerline of cross-roads, on N. end of 18-in. concrete pipe culvert; chiseled square	706.46
"TT 60 HF 1948 679" (Described in line 1)	678.619

NGVD 29
Elevations

12
LINE 17.

Feet

By W. D. Leach, 1956; Book AV 458

8 36 24.14 Neighbors Grove; 0.2 mi N. of Methodist Church; 175 ft N. of NE. corner of Asheboro weaving mill; 31 ft S. and 23 ft E. of crossroads; 34 ft E. of centerline of U.S. Highway 311; 13 ft SE. of fire hydrant in concrete post; standard tablet stamped "TT 56 HF 1948" (Reported not found, 1970)

720.270

8 36 24.14 Reference mark; 60 ft E. of tablet; top of highway marker

723.53