

2ND ORDER LEVELING
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

36-077-32
ENFIELD QUADRANGLE
206 NORTH CAROLINA
N3600-47730/15
DIAGRAM NJ 18-10
NORFOLK


Edgecombe, Halifax, and Nash Counties

Final adjustment of 1974

Edition of 1/31/75

PR: WSM/rmc

NGVD 29
Elevations

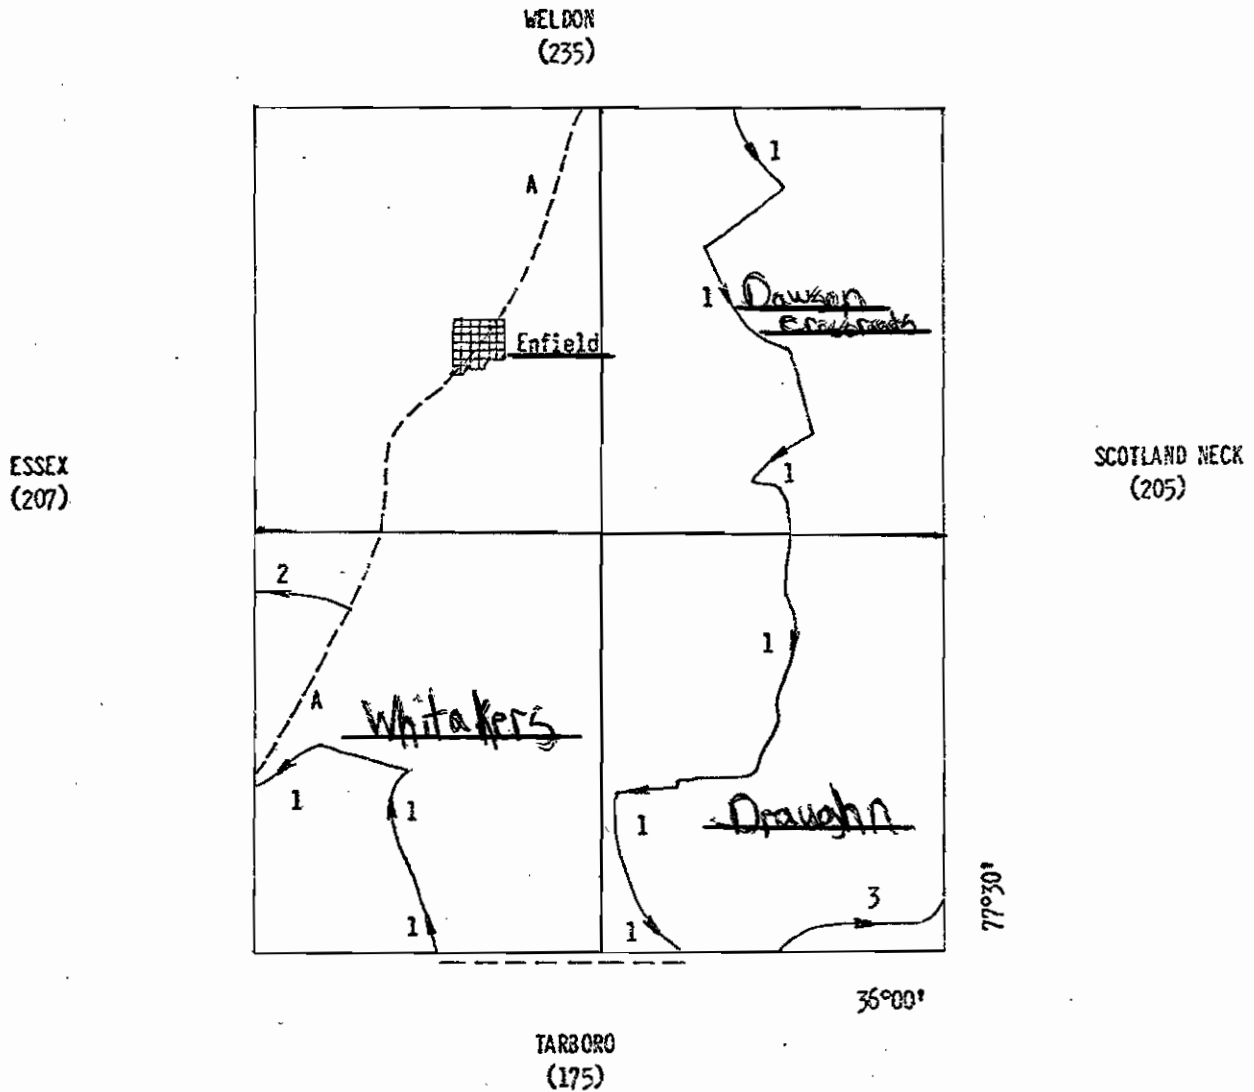

NGS (USC&GS) VERTICAL CONTROL DATA

A. Quadrangle 360773

206

INDEX OF PERMANENT MARKS

<u>MARK (USGS)</u>	<u>PAGE NO.</u>	<u>USCE</u>	<u>PAGE NO.</u>
82 WSM 1955 112	3	C OF E MON #8	5
83 WSM 1955 98	3	C OF E MON #9	5
84 WSM 1955 107	3		
85 WSM 1955 108	3	<u>NGS</u>	
86 WSM 1955 75	3		
87 WSM 1955 62	3	H 35 1932	5
88 WSM 1955 78	4	K 35 1932	5
89 WSM 1955 78	4	O'NEAL NO 1 1933	4
90 WSM 1955 110	4	O'NEAL NO 2 1933	4
91 WSM 1955 98	4		
94 WSM 1955 79	4		
95 WSM 1955 96	4		
96 WSM 1955 119	5		
97 WSM 1955 111	5		
115 WSM 1955 128	5		

NGVD 29
Elevations

1955

<u>LINE 1.</u>	<u>NGVD 29 Elevations</u>	<u>Feet</u>
By W. S. Monk, 1955; Book AV 424		
U.E., Halifax, 3.6 mi S. of, thence 3.4 mi SE.; at drain; on S. end of W. concrete headwall of culvert; chiseled cross		73.54
Halifax, 3.6 mi S. of, thence 4.3 mi SE. along State Highway 125; 4.6 mi SW. of Tillery; 45 ft N. and 40 ft E. of, and 1 ft lower than intersection of State Highways 125 and 481; in concrete post; standard tablet stamped "82 WSM 1955 112"		112.251
Reference mark; 170 ft SW. of tablet; 20 ft S. and 115 ft W. of crossroads; on concrete headwall of culvert; chiseled cross		115.49
Tillery, 6.1 mi SW. of; at drain; on E. end of S. concrete headwall of culvert; chiseled cross		80.75
Tillery, 6.6 mi SW. of; 15 ft N. and 225 ft W. of and 1 ft lower than junction of State Highway 481 and I-rd. S.; in W. end of concrete headwall of culvert; standard tablet stamped "83 WSM 1955 98"		97.859
Reference mark; 0.4 mi E. of tablet; 12 ft S. of rd.; on W. end of S. concrete headwall of culvert; chiseled cross		80.97
Tillery, 6.6 mi SW. of, thence 1.9 mi SE.; 20 ft SE. of, and 1 ft lower than lane E.; on S. end of concrete pipe culvert; chiseled cross		114.31
Tillery, 6.6 mi SW. of, along State Highway 481, thence 2.6 mi SE.; 1.4 mi SW., thence 2.3 mi NW. of Dawson Crossroads; 60 ft N. of, and level with lane SW.; 245 ft SW. of SE. corner of residence of R. A. Lewis; 4 ft SE. of 12-in. elm tree; in concrete post; standard tablet stamped "84 WSM 1955 107"		106.961
Reference mark; 35 ft S. of tablet; on N. end of concrete pipe culvert; chiseled cross		104.70
Dawson Crossroads, 1.4 mi SW. of, thence 1.6 mi NW.; 60 ft E. of, and 1 ft above junction of lane NE.; in root on SW. side of 30-in. oak tree; copper nail and washer		123.81
Dawson Crossroads, 1.4 mi SW. of; 61 ft N. and 27 ft E. of, and 1 ft lower than junction of rd. NW.; 5 ft W. of REA pole; in concrete post; standard tablet stamped "85 WSM 1955 108"		107.421
Reference mark; 1220 ft N. of tablet; 20 ft E. of, and 2 ft lower than lane W.; on E. end of concrete pipe culvert; chiseled cross		103.74
Dawson Crossroads, 2.9 mi SW. of, 0.4 mi W. of Beach Swamp; 30 ft NW. of, level with junction of, and in line with center of rd. SE.; in concrete post; standard tablet stamped "86 WSM 1955 75"		74.366
Reference mark; 180 ft SE. of tablet; in root on E. side of 28-in. gum tree; copper nail and washer		74.86
Dawson Crossroads, 2.9 mi SW. of, thence 3.0 mi S.; 0.2 mi S. of V-rd. junction; 440 ft S. of lane W.; in concrete post; standard tablet stamped "87 WSM 1955 62"		61.730
Reference mar; 0.4 mi N. of tablet; 30 ft E. of, and 1 ft above lane E.; top of 4- by 4-in. concrete post with letters M.C.B., projecting 2 in.		64.89

LINE 1 (Cont'd)

Feet

Leggett, 8.1 mi N. of; on SE. concrete abutment of steel girder bridge crossing Fishing Creek; chiseled cross	73.14
Leggett, 6.5 mi N. of; 110 ft S. and 35 ft W. of, and 1 ft lower than I-rd. W.; 15 ft E. of Va. E. & P. pole # TL 19783; in concrete post; standard tablet stamped "88 WSM 1955 78"	77.507
Reference mark; 12 ft S. of tablet; in root on SW. side of 28-in. hickory tree; copper nail and washer	78.01
Leggett, 4.7 mi N. of; 85 ft N. of H. C. Lewis store; 100 ft N. and 30 ft E. of, and 2 ft lower than I-rd. W.; 2.5 ft N. of power pole N. 88; in concrete post; standard tablet stamped "89 WSM 1955 78"	77.830
Reference mark; 14 ft E. of tablet; on concrete well corner; chiseled cross	78.79
Leggett, 4.7 mi N. of, thence 0.5 mi W.; at drain; on E. end of N. headwall of concrete culvert; chiseled cross	72.80
Battleboro, 8.8 mi E. of; 7 paces N. of center of rd.; in yard of G. M. O'Neal; 27 paces SE. of SW. corner of residence; 11 paces E. of mail box; in concrete post; NGS standard reference disk stamped "O'NEAL NO 1 1933"	113.602
Battleboro, 8.8 mi E. of; 16 ft S. of center of rd.; 46 ft E. of telephone pole; in concrete post; NGS standard reference disk stamped "O'NEAL NO 2 1933"	115.148
Leggett, 4.7 mi NW. of; 40 ft SE. of, and 1 ft lower than I-rd. E.; on S. end of concrete pipe culvert; chiseled cross	110.39
Leggett, 4.5 mi NW. of, along Whitaker Road; 1320 ft S. of I-rd. E.; at drain; in S. end of W. concrete headwall of culvert; standard tablet stamped "90 WSM 1955 110"	109.553
Reference mark; 0.3 mi S. of tablet; 160 ft S. and 25 ft W. of, and level with lane W.; in root on SE. side of 26-in. oak tree; copper nail and washer	113.01
Leggett, 3.1 mi NW. of; at drain and hedge row E.; on E. end of concrete pipe culvert; chiseled cross	109.13
Leggett, 1.9 mi NW. of; 120 ft N. and 30 ft W. of and 1 ft above Y-rd. NW.; in concrete post; standard tablet stamped "91 WSM 1955 98"	98.145
Reference mark; 10 ft W. of tablet; in root on W. side of 14-in. hickory tree; copper nail and washer	98.24

[Jogs into Tarboro quadrangle]

Battleboro, 4.9 mi SE. of; 115 ft S. and 200 ft W. of, and level with I-rd. N.; at Phillips High School; in concrete steps; standard tablet stamped "94 WSM 1955 79"	78.924
Reference mark; 70 ft N. of tablet; on concrete base of flag pole; chiseled cross	79.06
Battleboro, 4.9 mi SE. of, thence 1.3 mi N.; 290 ft S. and 25 ft E. of, and 1 ft lower than I-rd. W.; 27 ft NW. of NW. corner of residence; in concrete post; standard tablet stamped "95 WSM 1955 96"	95.455

NGVD 29
Elevations

LINE 1 (Cont'd)

Feet

Reference mark; 200 ft NW. of tablet; on W. end of concrete pipe culvert; chiseled cross	93.08
Battleboro, 4.9 mi SE. of, thence 2.4 mi N.; 160 ft S. and 15 ft E. of, and 2 ft lower than lane W.; on E. end of concrete pipe culvert; chiseled cross	112.73
Gethsemane, 5.8 mi SW. of; 150 ft SW. of, and 1 ft lower than crossroads; 25 ft NW. of rd.; 105 ft NW. of NE. corner of residence; in concrete post; standard tablet stamped "96 WSM 1955 119"	118.712
Reference mark; 160 ft SE. of tablet; in root on E. side of 30-in. oak tree; copper nail and washer	117.69
Gethsemane, 3.1 mi SW. of; thence 1.7 mi W.; 2.0 mi NE. of Battleboro; 50 ft N. and 8 ft W. of intersection of rd. and lane N.-S.; 2.5 ft N. of power pole 7621; in concrete post; standard tablet stamped "97 WSM 1955 111"	110.732
Reference mark; 1960 ft SE. of tablet; 30 ft SW. of rd.; in root on NE. side of triangular blazed 18-in. oak tree; copper nail and washer	103.96
"H 35 1932" (NGS)	131.325

LINE 2.

By W. S. Monk, 1955; Book AV 424

"K 35 1932" (NGS)	133.661
Whitakers, 2.0 mi W. of; 24 ft N. and 300 ft E. of, and 3 ft lower than junction of State Highway 44 and rd. S.; in E. end of concrete headwall of culvert; standard tablet stamped "115 WSM 1955 128"	128.433
Reference mark; 340 ft W. of tablet; 70 ft N. of junction of rd. S.; inroot on W. side of 12-in. gum tree; copper nail and washer	131.66

LINE 3.

By R. H. Paine, 1955; Book AV 424

Leggett, 2.1 mi NE. of; on E. end of N. concrete wheelguard of Maple Swamp Overflow Bridge; chiseled square	55.81
Leggett, 2.8 mi NE. of; 21 ft N. of center of State Highway 95; 44 ft E. of 18-in. persimmon tree; 42 ft S. of double elm tree; 1.5 ft E. of E. corner of fence corral; on iron pipe; in concrete post; USCE standard cap stamped "C of E MON #8 (USCE elevation not held) (Reported destroyed, 1956)	55.086
Leggett, 2.9 mi NE. of; 22 ft N. of center of State Highway 95; on S. edge of cultivated field; 199 ft W. of fence line S.; on iron pipe; in concrete post; USCE standard cap stamped "C of E MON #9" (USCE elevation not held)	57.614