

RD-ORDER LEVELING  
NATIONAL GEODETIC VERTICAL DATUM OF 1929

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

35-078-34  
LILLINGTON QUADRANGLE  
109 NORTH CAROLINA  
N3515-W7845/15  
DIAGRAM NI 17-3  
RALEIGH

Cumberland and Harnett Counties


Final adjustment of 1973

Edition of 11/20/75

PR: WSM/ale

NGVD 29  
Elevations

FUQUAY SPRINGS  
(146)

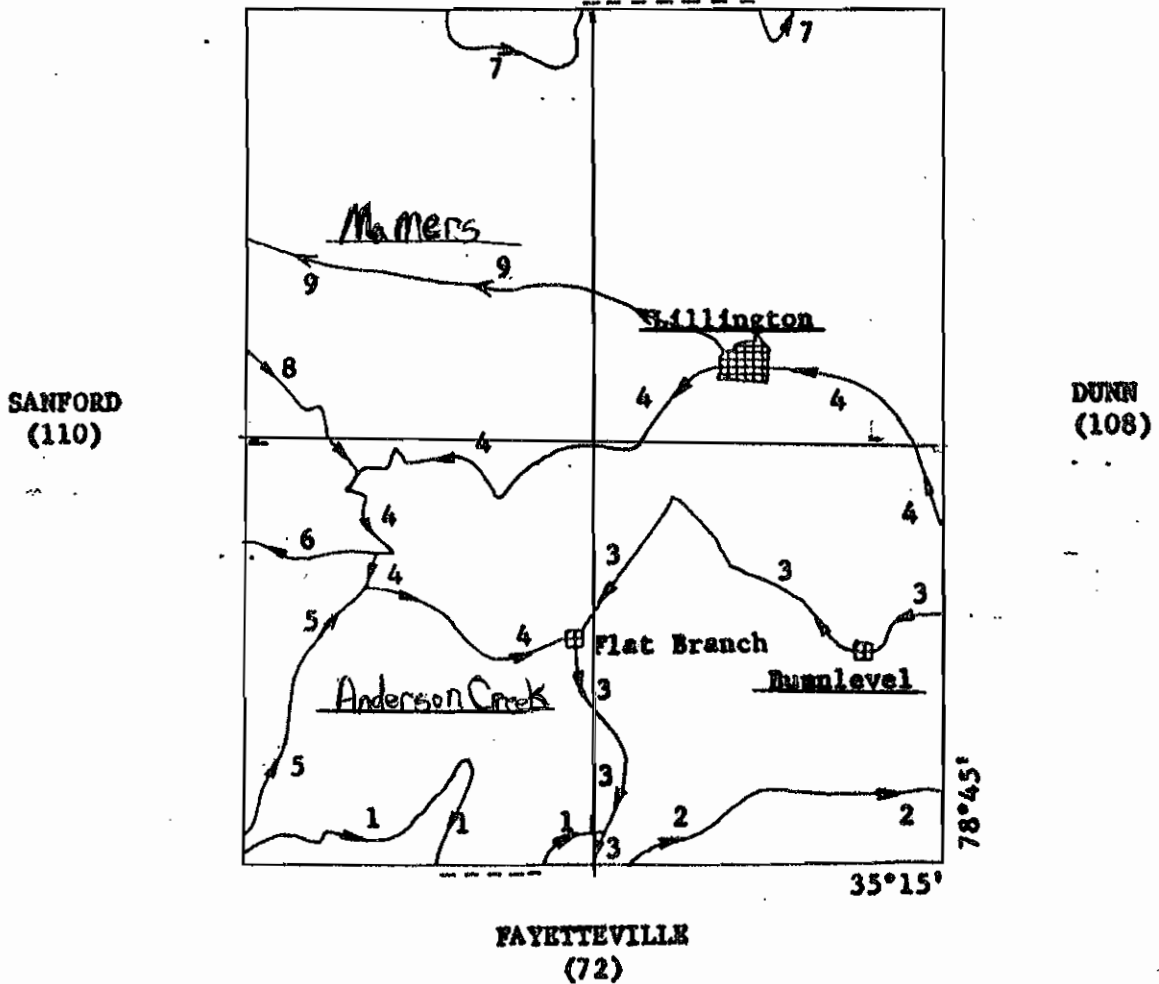

INDEX OF PERMANENT MARKS

<u>MARK (USGS)</u>	<u>PAGE NO.</u>	<u>MARK (USED)</u>	<u>PAGE NO.</u>
13 JRR 1946 175	3	2 TT A 83 NC 42 USCE MONUMENT 20	3
TT 2 WAC 1946 307	3	C OF E MON 24	4
TT 6 WAC 1946 130	4	C OF E MON 34	5
TT 7 WAC 1946 119	4	C OF E MON 41	5
TT 8 WAC 1946 116	4		
144 WSM 1955 134	5	<u>N.C. GEODETIC SURVEY</u>	
145 WSM 1955 179	5		
146 WSM 1955 272	5	N+C 128	3
147 WSM 1955 168	6	DRAIN 1970	16
148 WSM 1955 167	6	DOUGLAS 1970	16
150 WSM 1955 164	7	OAK 1970	15
151 WSM 1955 173	7	SUMMER 1970	14
152 WSM 1955 253	7,13	THOMAS 1970	15
153 WSM 1955 159	7	HARVEY 1972	14
154 WSM 1955 178	8	RICK 1972	14
155 WSM 1955 290	8	SECTION 1972	13
156 WSM 1955 293	8,13		
157 WSM 1955 276	8	<u>NGS</u>	
158 WSM 1955 182	8,10		
159 WSM 1955 235	9	BUNNLEVEL 1949	5
160 WSM 1955 292	9	BUNNLEVEL 1949 (Az. Mk.)	5
161 WSM 1955 191	9	BUNNLEVEL NO 2 1949	4
162 WSM 1955 287	10	LAFAYETTE 1957 (Az MK) - (Not Found 83)	12
163 WSM 1955 337	10	LAFAYETTE NO 1 1957 (Good 83)	12
164 WSM 1955 251	10	LAFAYETTE NO 2 1957 (Good 83)	12
165 WSM 1955 249	11		
166 WSM 1955 243	11		
8 DRD 1960 149	11		
9 DRD 1960 356	11		
10 DRD 1960 362	11		
12 MLW 1973 308	12		
13 MLW 1973	12		
14 MLW 1973 215	13		

NGVD 29  
Elevations

LILLINGTON  
Book V 262

109 NORTH CAROLINA

J. A. Rigby

1946

LINE 1.

Feet

J. A. Rigby, 1946; Book V 262

Manchester, 8.5 mi NE. of; 102 ft NE. of NE. corner of church; 29 ft W. of center of State Highway 210; 15.6 ft S. of driveway; on bank; in concrete post; North Carolina Geodetic Survey standard disk stamped "W+C 128"	238.095
Manchester; 8.6 mi NE. of RR. depot, along hwy.; 64 ft S. and 30 ft E. from junction of T-rd. W., forming diagonal crossroad; 22 ft W. of center of dirt rd. SE.; in concrete post; on iron post; standard cap stamped "2 TT A 83 NC 42 USCE MONUMENT 20"	231.014
U.E., Overhills; 3.3 mi NE. of freight depot; crossing State Highway 87 to rd. forks, thence 5.2 mi NE. along dirt rd.; 8.6 mi NE. along State Highway 210, thence 0.6 mi W. along dirt rd. from Manchester Railroad Depot; 210 ft SE. of SE. corner of chimney of house; 25 ft W. of driveway; 22 ft N. of center of rd.; in root on SW. side of 12-in. red oak tree; copper nail and washer	188.74
Overhills; 3.3 mi NE. of freight depot, along dirt rd. to forks, thence 4.2 mi along right fork; 8.6 mi NE. along State Highway 210, thence 1.6 mi W. along dirt rd. from Manchester Railroad Depot; 331 ft NE. of bridge; 18 ft SE. of center of rd.; 11 ft N. of path E.; on bank; about 1 ft higher than grade; in concrete post; standard tablet stamped "13 JRR 1946 175"	175.500
Reference mark; 290 ft SW. of tablet; 51 ft N. of bridge; 20 ft NW. of center of rd.; in root on W. side of 17-in. pine tree; rail spike	172.26
U.E., Overhills; land line marker; S. of rd. and opposite white frame house; in concrete post inscribed "O L L CO 48"; iron spike	291.180
U.E., Overhills, 3.3 mi NE. of, along dirt rd. to fork crossing State Highway 87, thence 2.7 mi E. along dirt rd.; 8.6 mi NE. along State Highway 210, thence 3.1 mi SW. along dirt rd. from Manchester Railroad Depot; 750 ft SW. of frame house; 212 ft SW. of lone pine tree N. of rd.; 30 ft S. of center of rd.; 30 ft S. and 64 ft W. from crosstrail; in root on N. side of 11-in. pine tree; copper nail and washer	293.50
Manchester; 8.6 mi NE. of RR. depot, along State Highway 210, thence 3.9 mi SW. along dirt rd.; 4.0 mi W. of Anderson Creek School; 21 mi N. of Fayetteville Post Office, along State Highways 87 and 210 and dirt rd. SW.; 24 ft NE. of center of crossroad; 13 ft W. of 13-in. pine tree; 8 ft N. of ditch line; about 3 ft higher than grade; in concrete post; standard tablet stamped "TT 2 WAC 1946 307" (Destroyed, 1955)	306.847
Reference mark; 76 ft SW. of tablet; 120 ft NE. of NE. corner of frame house; 28 ft S. of center of E.-W. rd.; 28 ft S. and 44 ft W. from intersection of crossroad; in root on S. side of 13-in. pine tree; copper nail and washer	304.12

LINE 1 (Cont'd.)Feet

- U.E., Overhills; 3.3 mi NE. of freight station, along dirt rd. crossing State Highway, thence NE. 1.1 mi on right fork; 8.6 mi NE. along State Highway 210, thence 4.7 mi SW. along dirt rd. from Manchester RR. Depot; at crest of hill; 101 ft NE. of NE. corner of tobacco barn; 26 ft N. of center of rd.; 26 ft N. and 122 ft W. from junction of T-rd. S.; in root on NW. side of 10-in. pine tree; rail spike 293.25
- Manchester; 3.2 mi NW. of RR. depot, along State Highway 87, thence 1.9 mi NE. along dirt rd.; 0.2 mi SW. of wooden bridge over McLeod Creek; 25 ft E. of centerline of fork; 22 ft N. and 85 ft E. from junction of Y-rd. forks; on iron pipe; standard cap stamped "C OF E MON 24" 214.798

LINE 2.

J. R. Rigby, 1946; Book V 262

- Fayetteville, 14.1 mi N. of, along U. S. Highway 15A, thence 1.5 mi NW. along dirt rd.; 5.2 mi NE. along State Highway 210, thence 3.4 mi E., thence 0.5 mi S., thence 3.0 mi E. along dirt rd. from Manchester; 44 ft E. of center of rd. fork; 32 ft E. of rd. sign; 21 ft S. of centerline of rd. to Bunnlevel; 20 ft N. of rd. to field; 3 ft above rd. level; in concrete post projecting 5 in. above ground; standard tablet stamped "TT 6 WAC 1946" (Reported destroyed, 1955) 130.260
- Reference mark; 33 ft SE. of tablet; 56 ft SE. of center of rd. to Bunnlevel; 8 ft SE. of center of field rd.; in root on E. side of 18-in. red oak tree; copper nail and washer 130.11
- U.E., Bunnlevel, 2.8 mi S. of, along U. S. Highway 15A, thence 2.4 mi W. along dirt rd.; 30 ft SE. of NE. corner of frame house; 18 ft W. of centerline of N.-S. rd.; 15 ft S. and 18 ft W. from T-rd. E.; in root on E. side of 15-in. chinaberry tree; copper nail and washer 128.90
- Bunnlevel, 2.8 mi S. of, along U. S. Highway 15A, thence 1.5 mi W. along dirt rd.; 191 ft E. of crosstrail; 100 ft N. of stream; 18 ft S. of center of rd.; near NW. corner of plowed field; in concrete post; standard tablet stamped "TT 7 WAC 1946 119" (Not found, 1964) 110.102
- Reference mark; 106 ft W. of tablet; 85 ft E. of crosstrail; 16 ft S. of center of rd.; in N. side of 14-in. sweetgum tree; rail spike 118.61
- U.E., Bunnlevel, 2.8 mi S. of, along U. S. Highway 15A, thence 0.75 mi W. along dirt rd.; 700 ft E. of residence; 45 ft N. of center of rd.; 36 ft SW. of driveway; at E. end of large pine grove; in S. side of 13-in. oak tree; rail spike 122.12
- "TT 8 WAC 1946 116" (Destroyed) 116.817
- Reference mark; 72 ft NW. of tablet; 28 ft N. of center of rd.; in root on W. side of 20-in. pine tree; copper nail and washer 117.61

LINE 3.

W. S. Monk, 1955; Book AV 432 a

- 1 13 5.84 U.E., 35 ft SW. and 2 ft lower than junction drive S.; on concrete pipe culvert; chiseled square 124.44
- 1 15 6.90 Reference mark No. 2; 80 ft W. of disk; 1 ft E. of power pole; in concrete post; NGS standard reference mark disk stamped "BUNNLEVEL NO 2 1949" 148.027

LILLINGTON

109 NORTH CAROLINA

LINE 3 (Cont'd.)

Feet

1	16	6.90	Bunnlevel; 87 ft SE. of intersection of Highway 15A and paved rd. E.; 51 ft E. of Highway 15A; 30 ft S. of SW. corner of frame building; in concrete post; NGS standard triangulation station disk stamped "BUNNLEVEL 1949"	145.465
1	17	7.24	Bunnlevel, 0.3 mi N. of; 165 ft E. of hwy.; 71 ft S. of SW. corner of Bunnlevel Presbyterian Church; in concrete post; NGS standard azimuth mark disk stamped "BUNNLEVEL 1949"	151.184
1	23	9.55	Bunnlevel Presbyterian Church, 2.4 mi NW. of; 150 ft SE. of crossing McLean Creek; 35 ft SW. and 3.0 ft lower than rd.; in concrete post; standard tablet stamped "144 WSM 1955 134"	133.515
1	24	9.62	Reference mark; 390 ft NW. of tablet; 130 ft E. of residence; 45 ft NE. of rd.; in root on NW. side of 10-in. oak; rail spike	137.76
1	25	10.18	U.E., 20 ft SE. and 1 ft lower than lane SW.; on concrete pipe culvert; chiseled cross	143.99
1	26	10.80	U.E., at drain; 5 ft lower than centerline of rd.; on W. end of concrete pipe culvert; chiseled cross	147.27
1	27	11.45	Reference mark; 35 ft NW. of tablet; on W. end of concrete pipe culvert; chiseled cross	177.20
1	28	11.45	Bunnlevel, 4.3 mi NW. of; 3.5 mi S. via North Carolina Highway 210, thence 0.6 mi SE. of Lillington; 130 ft SE. and level with junction of rd. SW.; 25 ft SW. of rd.; 8.0 ft NE. of power pole 10; in concrete post; standard tablet stamped "145 WSM 1955 179"	178.854
1	31	12.23	Lillington, 3.5 mi SW. of; 500 ft SW. and 2 ft lower than junction rd. SE.; 18 ft W. of Highway 210; 9 ft N. of centerline of drive; in concrete post; on iron pipe; standard cap stamped "C OF E MON #41"	171.724
1	34	14.01	U.E., 400 ft SW. of lane NW.; 20 ft SE. of Highway 210; on NE. corner of concrete headwall of culvert; chiseled cross	254.44
1	35	14.55	Lillington, 5.9 mi SW. of; 80 ft SW. and 1 ft lower than Y-rd. SE.; 600 ft NE. of rd. junction NW.; 29 ft NW. of North Carolina Highway 210; 29 ft SW. of SW. corner of tobacco barn; 2.0 ft SE. of telephone pole #96; in concrete post; standard tablet stamped "146 WSM 1955 272"	272.072
1	36	14.55	Reference mark; 110 ft SW. of tablet; 40 ft NW. of Highway 210; in root on SE. side of 9-in. pine; copper nail and washer	270.46
1	38	15.59	Lillington, 6.9 mi SW. of; 0.3 mi NE. of crossroad; 32 ft NW. of North Carolina Highway 210; 9 ft SW. of drive; 60 ft NE. of telephone pole #115; in concrete post; capped iron pipe; "C OF E MON #34"	257.044

LILLINGTON

109 NORTH CAROLINA

LINE 3 (Cont'd.)

Feet

1	39	15.92	U.E., 80 ft SW. and 2 ft lower than crossroad; on S. end of concrete headwall of culvert; chiseled cross	246.81
1	41	16.82	Lillington, 7.2 mi SW. of, along North Carolina Highway 210, thence 0.9 mi S.; 6.0 mi W. of Bunnlevel; 600 ft N. and 19 ft E. of Y-rd. E.; at drain; set in N. end of E. concrete headwall of culvert; standard tablet stamped "147 WSM 1955 168"	167.880
1	42	16.95	Reference mark; 660 ft S. of tablet; 60 ft W. and 1 ft above junction of rd. E.; in root on E. side of 20-in. oak; copper nail and washer	176.54
1	43	17.65	U.E., 130 ft S. of barn; 50 ft SE. and 2 ft lower than lane E.; on E. end of concrete pipe culvert; chiseled cross	239.05
1	45	18.63	U.E., 35 ft SW. and level with lane W.; 8 ft N. of NE. corner of store; in root on E. side of 14-in. oak; copper nail and washer	255.24
1	46	19.42	Reference mark; 120 ft N. of tablet; 40 ft W. of rd.; in root on NE. side of 24-in. oak; copper nail and washer	167.45
1	47	19.42	Bunnlevel, 6.0 mi W. of, thence 2.4 mi S.; 1.4 mi E., thence 1.2 mi N. of Bethel Church; 150 ft S. and 32 ft W. and 3.0 ft lower than Y-rd. NE.; 3.0 ft E. and 10 ft N. of fence corner; in concrete post; standard tablet stamped "148 WSM 1955 167"	166.745
1	49	20.16	U.E., 600 ft N. of Y-rd. NW. at drain; on N. end of W. headwall of concrete culvert; chiseled cross	132.82
1	52	21.65	U.E., 70 ft S. and 15 ft E. of, and 2 ft lower than lane S.; in root on N. side of 26-in. oak; copper nail and washer	156.18
1	55	23.18	Manchester Station, 6.3 mi NE. of, along hwy., thence 0.9 mi E. along rd.; 1.2 mi W. of Bethel Church; 97 ft S. of rd.; 12 ft S. of field rd.; 12 ft W. of driveway; 40 ft NW. of chimney of house; in root on NE. side of 36-in. red oak; copper nail and washer	201.920

LINE 4.

W. S. Monk, 1955; Book AV 432 a

1	61	3.03	U.E., at drain; on W. end of concrete pipe culvert; chiseled cross	155.58
1	63	4.11	Reference mark; 120 ft SE. of tablet; in root on NE. side of 28-in. oak; copper nail and washer	164.30

LILLINGTON

109 NORTH CAROLINA

LINE 4 (Cont'd.)

Feet

1	64	4.11	Bunnlevel, 2.1 mi E. of, thence 4.0 mi N.; 6.9 mi ESE. of Lillington; 0.4 mi SE. of brick residence; 410 ft NW. of field rd. NE.; 40 ft NW. of drive SW. to tobacco barns; 21 ft SW. of rd.; 8.5 ft NW. of 28-in. oak; 21 ft NE. of 22-in. pine; in concrete post; standard tablet stamped "150 WSM 1955 164"	164.164
1	66	5.25	U.E., 20 ft N. of drive SW.; on N. end of concrete pipe culvert; chiseled cross	162.61
1	67	5.86	U.E., at drain; on S. end of W. concrete headwall of culvert; chiseled cross	129.92
1	68	6.27	Lillington; 1.4 mi E. of intersection of Main and McNeill Street; 115 ft E. and 25 ft N. and level with Y-rd. SE.; 150 ft N. of NW. corner of residence; in concrete post; standard tablet stamped "151 WSM 1955 173" (Not found, 1964)	172.846
1	69	6.56	Reference mark; 0.3 mi W. of tablet at drain; on W. end of S. concrete headwall of culvert; chiseled cross	166.22
1	71	7.71	Reference mark; 40 ft NW. and level with intersection of Main and McNeill Streets; 0.25 mi E. of tablet on concrete headwall of culvert; chiseled cross	204.16
1	72	7.97	Lillington; 175 ft W. and 40 ft S. of, and 7.0 ft above intersection of McNeill Street and 10th Street; set in concrete base for NW. leg of water tank; standard tablet stamped "152 WSM 1955 253"	253.205
1	73	8.33	U.E., 150 ft E. and 20 ft N. of, and level with Y-rd. junction; 1-1/2 by 1-1/2 concrete post projecting 1-1/2 ft above ground; chiseled cross	255.14
1	74	8.93	U.E., 100 ft E. and 30 ft S. of, and 2 ft above T-rd. E.; in root on SW. side of 20-in. oak tree; copper nail and washer	271.94
1	78	11.11	Lillington; water tank at 10th Street and McNeill; 3.1 mi SW. of, along Pineview Road; 0.3 mi E. of Mt. Ariel Methodist Church; at drain; in W. end of N. headwall of concrete culvert; standard tablet stamped "153 WSM 1955 159"	158.782
1	79	11.25	Reference mark; 760 ft W. of tablet; 70 ft NW. and level with lane S.; at drain; on W. end of concrete headwall of culvert; chiseled cross	173.57
2	1	12.55	U.E., 60 ft S. and 20 ft W. of, and level with crossroad; in root on N. side of 9-in. oak tree; copper nail and washer	229.91
2	2	13.12	Reference mark; 0.3 mi E. of tablet; 150 ft W. and 35 ft N. of, and 1 ft above junction rd. N.; in root on N. side of 16-in. oak tree; copper nail and washer	221.29

LILLINGTON

109 NORTH CAROLINA

LINE 4 (Cont'd.)

Foot

2	3	13.40	Lillington, 5.4 mi SW. of; 2.6 mi W. of Mt. Ariel Methodist Church; 0.3 mi W. of I-rd. N.; at drain; set in W. end of N. headwall of concrete culvert; standard tablet stamped "154 WSM 1955 178"	177.396
2	5	14.32	U.E., 120 ft E. and 75 ft S. of, and level with crossroad; in root on N. side of 12-in. oak tree; copper nail and washer	212.58
2	7	15.67	Lillington, 6.3 mi SW. of, thence 1.3 mi N.; 1.0 mi E. along U. S. Highway 421, thence 2.9 mi S. of Mamers; 90 ft S. and 22 ft E. of, and level with I-rd. W.; 24 ft W. of power pole; in concrete post; standard tablet stamped "155 WSM 1955 290"	289.784
2	8	15.76	Reference mark; 410 ft W. of tablet; 300 ft W. and 30 ft N. of I-rd. N.; in root on W. side of 8-in. hickory tree; copper nail and washer	300.33
2	9	16.36	U.E., 30 ft W. of lane S.; at drain; on S. end of concrete pipe culvert; chiseled cross	303.64
2	11	17.65	Reference mark; 140 ft SE. of tablet; 30 ft E. of rd.; in root on W. side of 26-in. pine tree; copper nail and washer	294.63
2	12	17.65	Mamers, 3.3 mi S. of; 0.5 mi N. of Spring Hill Methodist Church; 180 ft N. and 20 ft W. of, and 1 ft lower than Y-rd. NE.; 2 ft E. of 12-in. pine tree; in concrete post; standard tablet stamped "156 WSM 1955 293"	293.042
2	13	18.13	U.E., 700 ft SW. of Y-rd. SE.; 60 ft SE. and 1 ft above rd.; center of concrete steps at Spring Hill Methodist Church; chiseled cross	311.62
2	17	19.65	Reference mark; 60 ft SE. of tablet; in root on NW. side of 12-in. oak tree; copper nail and washer	276.52
2	18	19.65	Spring Hill Methodist Church, 0.4 mi S. of, thence 0.7 mi W., thence 0.4 mi SE.; 170 ft NW. of residence of Exum Womble; 45 ft S. and 18 ft W. of, and 1 ft above Y-rd. junction; 3 ft N. of NE. corner tobacco barn; in concrete post; standard tablet stamped "157 WSM 1955 276"	276.246
2	20	20.60	U.E., 20 ft NW. and level with drive W.; on W. end of concrete pipe culvert; chiseled cross	214.09
2	22	21.83	Spring Hill Methodist Church, 2.0 mi S. of, thence 1.0 mi SW.; 8.8 mi SW. of Lillington; 600 ft W. of bridge crossing Upper Little River; 75 ft E. and 40 ft S. of, and 4 ft lower than rd. S.; 25 ft N. of power pole; in concrete post; standard tablet stamped "158 WSM 1955 182"	182.045
2	23	21.83	Reference mark; 115 ft W. of tablet; on W. end of concrete pipe culvert; chiseled cross	181.23



LILLINGTON

109 NORTH CAROLINA

LINE 4 (Cont'd.)

Foot

2	24	22.41	U.E., 50 ft W. and 3 ft lower than T-rd. E.; on W. end of concrete pipe culvert; chiseled cross	239.87
2	27	24.01	Reference mark; 220 ft W. of tablet; 25 ft S. of rd.; on concrete pipe culvert; chiseled cross	225.39
2	28	24.01	Lillington, 7.2 mi SW. of, along North Carolina Highway 210, thence 3.4 mi W.; 3.3 mi W. of Flat Branch Church; 140 ft W. and 30 ft N. of, and level with rd. S.; 75 ft NE. of telephone pole #45; 100 ft SE. of SE. corner of house; 2 ft S. of power pole; in concrete post; standard tablet stamped "159 WSM 1955 235"	235.004
2	30	24.90	U.E., 20 ft W. and 1 ft lower than lane W.; on N. end of concrete pipe culvert; chiseled cross	252.08
2	32	26.36	Reference mark; 3 ft S. of tablet; in root on N. side of 1 1/4-in. hickory tree; copper nail and washer	291.92
2	33	26.36	Lillington, 7.2 mi SW. of, along North Carolina Highway 210, thence 1.0 mi W.; 0.9 mi W. of Flat Branch Church; 40 ft S. and 40 ft W. of, and 2 ft lower than junction rd. S.; 40 ft NE. of telephone pole #14; in concrete post; standard tablet stamped "160 WSM 1955 292"	291.853

LINE 5.

W. S. Monk, 1955; Book AV 432 a

2	36	0.00	Overhills, 2.4 mi NE. of; 3.2 mi NW., thence 1.1 mi NE. from Manchester; 19 ft W. of centerline of rd.; 15 ft N. of field rd. W.; in root on E. side of 10-in. pine; rail spike	292.740
2	36	0.38	U.E., Y-rd. junction E. 0.4 mi SW. of; 27 ft S. of rd.; in face on N. side of 15-in. pine tree; rail spike	246.24
2	37	0.78	U.E., 60 ft SE. and 1 ft lower than Y-rd. N.; in face on W. side of 7-in. pine tree; rail spike	213.69
2	38	1.04	Reference mark; 44 ft NE. of tablet; in face on SW. side of 9-in. gum tree; rail spike	188.80
2	39	1.04	Overhills, 3.4 mi NE. of; 3.2 mi NW., thence 2.2 mi NE. of Manchester; 75 ft N. of E. end of bridge crossing McLeod Creek; 11.0 ft E. of creek; 20.0 ft W. of rd.; 3.0 ft E. of triangle blazed 24-in. gum tree; in concrete post; standard tablet stamped "161 WSM 1955 191"	191.23

LILLINGTON

109 NORTH CAROLINA

LINE 5 (Cont'd.)

Feet

2	40	1.80	U.E., 100 ft N. and 19 ft E. of, and 4 ft above drive W.; in root on NE. side of 18-in. oak tree; copper nail and washer	230.49
2	42	3.05	U.E., 430 ft N. and 30 ft E. of, and 4 ft lower than junction of rd. E.; in root on NW. side of 15-in. oak tree; copper nail and washer	317.279
2	43	3.42	Reference mark; 200 ft S. of tablet; 20 ft S. of rd. E.; in root on W. side of 8-in. oak tree; copper nail and washer	285.109
2	44	3.42	"162 WSM 1955 287" (Destroyed, 1955)	287.239
2	46	4.17	U.E., 55 ft NE. and 1 ft above Y-rd. E.; on E. end of concrete pipe culvert; chiseled cross	344.67
2	49	5.54	Reference mark; 20 ft S. of tablet; in face on W. side of 9-in. pine tree; rail spike	336.38
2	50	5.54	Flat Branch Church, 5.0 mi W. of, thence 1.7 mi S.; 0.3 mi N. of drain; 195 ft S. and 3.0 ft lower than lane W.; 28 ft E. of rd.; 160 ft E. of NE. corner of Union Methodist Church; 5-1/2 ft W. of 9-in. pine; in concrete post; standard tablet stamped "163 WSM 1955 337"	337.102
2	52	6.30	U.E., 25 ft S. and 1 ft lower than lane SE.; on S. end of concrete pipe culvert; chiseled cross	358.62
2	54	7.21	U.E., chiseled cross (Described in line 4)	239.87

LINE 6.

W. S. Monk, 1955; Book AV 432 a

2	55	0.00	"158 WSM 1955 182" (Described in line 4)	182.045
2	56	1.05	U.E., 35 ft NW. and 1 ft lower than drive N.; on W. end of L-shaped concrete headwall of culvert; chiseled cross	266.24
2	58	2.01	Lillington, 10.8 mi SW. of; 2.0 mi W. of bridge crossing Upper Little River; 6.8 mi NE. of Pineview; 0.5 mi W. of rd.; N. at drain; set in center of S. concrete headwall of culvert; standard tablet stamped "164 WSM 1955 251"	251.058
2	59	2.15	Reference mark; 720 ft W. of tablet; on SE. end of L-shaped concrete headwall of culvert; chiseled cross	272.42
2	60	2.74	U.E., 100 ft S. and 30 ft W. of, and 2.0 ft above crossroad; in root on NE. side of 36-in sycamore tree; copper nail and washer	279.52

## LILLINGTON

## 109 NORTH CAROLINA

LINE 6 (Cont'd.)
Feet

2	61	3.06	U.E., at drain; on E. end of S. concrete headwall of culvert; chiseled cross	248.36
2	62	3.57	Pineview, 5.3 mi NE. of, along Lillington Road; 1.6 mi W. of Barbecue Presbyterian Church; at drain; in E. end of S. concrete headwall of culvert; standard tablet stamped "165 WSM 1955 249"	249.181
2	63	3.57	Reference mark; 180 ft NW. of tablet; 30 ft N. of rd.; in root on NW. side of 32-in. oak tree; copper nail and washer	248.89
2	65	4.70	U.E., 115 ft W. and 25 ft S. of, and 3.0 ft lower than junction of rd. N.; in root on N. side of 8-in. oak tree; copper nail and washer	281.46
2	66	5.00	Pineview, 3.8 mi NE. of; 0.1 mi W. of Barbecue Presbyterian Church; 210 ft E. and 6.0 ft lower than Y-rd. junction; at drain; in W. end of S. concrete headwall of culvert; standard tablet stamped "166 WSM 1955 243"	242.975
2	67	5.00	Reference mark; 90 ft W. of tablet; in root on W. side of 14-in. oak tree; copper nail and washer	245.87

LINE 7.

D. R. Deane, 1960; Book AV 816

1	42	19.35	Duncan, 3.9 mi SW. of, thence 4.8 mi W. along Cokesburg River Road to double wooden bridge over Mill Creek; in easternmost bridge; in N. end of E. abutment; standard tablet stamped "8 DRD 1960 149"	148.494
1	42	19.36	Reference mark; 37 ft W. of tablet; on N. end of W. abutment; chiseled square	147.10
1	45	21.10	Duncan, 2.0 mi SE. of, along rd. to junction of Y-rd., thence 6.6 mi S. along rd. to junction of I-rd. W., thence about 0.3 mi W.; 100 ft S. of rd.; 8 ft W. of centerline of driveway; at E. end of brick residence; in step landing; standard tablet stamped "9 DRD 1960 356"	355.969
1	45	21.10	Reference mark; 25 ft N. of tablet; on concrete walk; chiseled square	356.18
1	47	22.15	Duncan, 2.0 mi S. of, along rd. to junction of Y-rd., thence 5.9 mi S., along rd. to Christian Light Church at crossroad; 38 ft W. of centerline of rd. E.; 40 ft N. of centerline of county rd. S.; in E. side of front porch of brick church; standard tablet stamped "10 DRD 1960 362"	361.489
1	47	22.16	Reference mark; 8 ft S. of tablet; on E. step wing; chiseled square	361.36

[Jogs into Fuquay Springs quadrangle]

LINE 7 (Cont'd.)Feet

1	60	28.52	Chalybeate, 0.5 mi S. of, along U. S. Highway 401; 31 ft E. of centerline of Highway 401; 45 ft W. of sand rd.; 4 ft N. of powerline; 1 ft N. of witness post; in concrete post; NGS standard azimuth mark disk stamped "LAFAYETTE 1957" (Not found, 1974)	304.525
1	61	29.07	Chalybeate, 0.5 mi S. of, along U. S. Highway 401; 18 ft N. of centerline of rd.; 14 ft S. of SE. corner of school building; in concrete post; NGS standard reference mark disk stamped "LAFAYETTE NO 2 1957" (Not found, 1974) <i>GOOD 12/83</i>	333.424
1	61	29.11	Chalybeate, 0.5 mi S. of, along U. S. Highway 401; 34 ft N. of pine tree; 90 ft SSE. of SE. corner of gymnasium; in concrete post; NGS standard reference mark disk stamped "LAFAYETTE NO 1 1957" <i>GOOD 12/83</i>	336.001 102.413M
1	62	29.70	U.E., on N. end of concrete culvert; chiseled square	235.51

LINE 8.

By M. L. Webster, 1973; Book AV 1688

1	21	8.69	Broadway, 1.7 mi E. of post office, along U. S. Highway 421, thence 5.3 mi S. and E. along County Road 1280 to T-junction N. with County Road 1232; 27 ft N. and 39 ft W. of, and 0.9 ft higher than centerline of T-rd. junction; in concrete post; standard tablet stamped "12 MLW 1973 308"	307.632
1	22	9.19	U.E., in centerline of rd. at drain crossing; nail and washer	237.93
1	23	9.77	Broadway, 1.7 mi E. of post office, along U.S. Hwy. 421, thence 6.4 mi S. along County Rd. 1280 to junction with County Rd 1229, thence 0.1 mi E. along Rd 1229 to junction with County Rd 1234; in SW. corner of landing of S. entrance to leaflet Presbyterian Church; 82 ft NW. of centerline of CR 1229; standard tablet stamped "13 MLW 1973 RESET 1980 (by NGS)"	323.358
1	24	10.48	U.E., in centerline of drive W.; nail and washer	261.04

LINE 8 (Cont'd.)Feet

1	25	10.73	Broadway, 1.7 mi E. of post office, along U. S. Highway 421, thence 6.4 mi S. along County Road 1280, thence 0.1 mi E. along County Road 1228, thence 1.0 mi S. along County Road 1234; in SE. end of concrete bridge over stream; standard tablet stamped "14 MLW 1973 215"	214.844
1	26	11.16	U.E., in centerline of T-rd. E. at junction of County Roads 1234 and 1241; nail and washer	292.16
1	27	11.91	U.E., in centerline of rd. at T-rd. W. (junction of County Roads 1241 and 1288); nail and washer	322.79
1	28	12.74	"156 WSM 1955 293" (Described in line 4)	293.042

LINE 9.

By H. L. Zohn, Jr., 1974; Book AV 1696.

1	2	0.00	"152 WSM 1955 253" (Described in line 4)	253.205
1	2	0.41	U.E., centerline of West Front and South 12th Streets (Photo 4-119)	205.83
1	3	0.71	U.E., centerline of rd. at drive N. (4-222-A)	207.53
1	4	0.91	U.E., centerline of cross streets (4-119)	233.42
1	5	1.66	Lillington, 1.5 mi WNW. of Harnett County Courthouse, along U. S. Highway 421; 0.1 mi NW. of intersection of Highway 421 and County Road 1300; about 300 ft W. of Sexton residence (brick); NE. of unused driveway entrance and under powerline; 80.4 ft N. of centerline of Highway 421; 4.9 ft N. of base of PP No. 363 with aluminum reference tag; 15 ft SE. of 8-in. pine (base) with aluminum reference tag; 19.1 ft WSW. of base of 7-in. pine (easternmost in line of four) with aluminum reference tag; 54 ft E. of base of 10-in. pine (on W. side of dirt rd.) with aluminum reference tag; 69.7 ft NE. of N. end of drain culvert under Highway 421; in concrete cylinder flush with ground; North Carolina Geodetic Survey standard traverse disk stamped "SEXTON 1972" (Photo 4-121) SEXTON	285.806

LINE 9 (Cont'd.)Feet

1	6	2.29	U.E., in centerline of U. S. Highway 421 and rd. to Manor Hills; copper nail and washer (4-121)	296.37
1	7	3.32	Lillington, 3.2 mi WNW. of Harnett County Courthouse, along U. S. Highway 421 to intersection with County Road 1302; about 150 ft NW. in grassy island directly in front of Harvey's Grocery Store; 41 ft NE. of centerline of Highway 421; 16.2 ft SW. of Harvey Grocery sign on 8-in. pole; 105.8 ft SSE. of PP with transformer and aluminum reference tag beside right-of-way marker; 141.4 ft W. of southernmost right-of-way marker on W. bank of County Road 1302; 74.2 ft S. of SW. corner of grocery store; 68.4 ft SW. of SE. corner of grocery store; in concrete cylinder flush with ground; NCGS standard traverse disk stamped "HARVEY 1972" (Photo 4-123)	342.968
1	8	3.93	Lillington, 3.8 mi WNW. of Harnett County Courthouse, along U. S. Highway 421; 0.5 mi E. of intersection of Highway 421 and County Road 1258; at power pole about 400 ft W. of farm rd.; about 150 ft E. of field rd.; 70.4 ft NNE. of centerline of Highway 421; 187.1 ft E. of centerline of farm rd. with culvert under; 2.4 ft S. of base of PP No. 108 with aluminum reference tag; 21.0 ft SSE. of projection of tangent of S. edge of where Highway 421 turns W.; in concrete cylinder flush with ground; NCGS standard traverse disk stamped "RICK 1972" (Photo. 4-123)	345.379
1	9	4.38	Mamers, 2.7 mi E. of; 0.2 mi N. of intersection of County Roads 1258 and 1291 in Luart, along Road 1258; in SW. corner of intersection of Road 1258 and U. S. Highway 421; 47.5 ft S. of centerline of Highway 421; 74.9 ft W. of centerline of Road 1258; 78.3 ft W. of aluminum reference tag on stop sign post; 90.6 ft NW. of aluminum reference tag on "Kee Right" sign post; 92 ft NE. of aluminum reference tag on PP No. 115; in concrete cylinder flush with surface of ground; NCGS standard disk stamped "SUMMER 1970" (Photo 4-123)	350.867
1	10	5.13	U.E., in centerline of cross drives; copper nail and washer (Photo 4-123)	333.99

LINE 9 (Cont'd.)Feet

1	11	5.69	Mamers, about 1.2 mi E. of; 1.4 mi W. of intersection of County Road 1258 and U. S. Highway 421 near community of Luart, along Highway 421; on top of bank near middle of curve; about 300 ft W. of trailer home on N. side of hwy.; 0.5 mi E. of County Road 1250; 60 ft S. of centerline of Highway 421; 66.4 ft WNW. of aluminum reference tag on PP; 122.7 ft WSW. of aluminum reference tag on speed limit sign; 201 ft E. of aluminum reference tag on PP; 176.7 ft SSW. of aluminum reference tag on PP; in concrete cylinder flush with ground; NCGS standard traverse disk stamped "THOMAS 1970" (Photo 4-125)	284.632
1	12	6.18	U.E., in centerline of crossroads; copper nail and washer (Photo 4-125)	272.95
1	13	7.03	U.E., in centerline of crossroads; copper nail and washer (Photo 4-125)	330.07
1	14	7.70	U.E., centerline of rd. at drain (Photo 4-126-A)	292.40
WL = 272 ft				
1	15	8.25	U.E., centerline of crossroads (4-127-C)	345.93
1	16	8.78	U.E., centerline of rd. at tree line N. (4-127-A)	357.79
1	17	9.04	Ryes, 1.7 mi E. of; 0.6 mi <sup>N</sup> of community of Arlington to intersection of County Road 1274 and U. S. Highway 421, thence 0.8 mi W. on Highway 421; on W. side of crest of hill near W. side of tree line on N. side of hwy.; 0.45 mi E. of County Road 1269; 24.9 ft N. of centerline of Highway 421; 58.8 ft SE. of aluminum reference tag on 8-in. hickory tree; 87.2 ft E. of aluminum reference tag on 6-in. oak tree; 231.2 ft E. of aluminum reference tag on PP; 100.4 ft SE. of right-of-way marker; in concrete cylinder 6 in. below surface of ground; NCGS standard traverse disk stamped "OAK 1970" (4-127)	386.196
1	18	9.45	U.E., in centerline of rd. at rd. SE.; copper nail and washer (Photo 4-99)	336.08

LINE 9 (Cont'd.)Feet

1	19	9.88	Ryes, about 0.9 mi E. of; 0.6 mi N. of community of Arlington to intersection of County Road 1274 and U. S. Highway 421, thence 1.25 mi W. on Highway 421 to County Road 1269, thence 0.4 mi W. on Highway 421; about 150 ft W. of E. end of tree line on N. side of hwy.; 0.95 mi E. of County Road 1265; 41.5 ft N. of centerline of Highway 421; 96 ft W. of aluminum reference tag on 15-in. maple tree; 37.2 ft S. of aluminum reference tag on PP; 68.7 ft SE. of aluminum reference tag on 4-in. pine tree; 143.3 ft W. of top of 15-in. culvert under Highway 421; in concrete cylinder flush with surface of ground; NCGS standard traverse disk stamped "DRAIN 1970" (Photo 4-99)	399.227
1	20	10.57	Ryes, 0.4 mi E. of; 0.6 mi N. of community of Arlington to intersection of County Road 1274 and U. S. Highway 421, thence 1.25 mi W. on Highway 421 to County Road 1269, thence 0.95 mi W. on Highway 421; on top of bank near NW. corner of wooded area; 0.4 mi E. of County Road 1265; 55.6 ft S. of centerline of Highway 421; 157.5 ft SW. of aluminum reference tag on speed limit sign post; 23.8 ft N. of aluminum reference tag on 12-in. oak tree; 25 ft NW. of aluminum reference tag on 6-in. oak tree; 61.9 ft NW. of aluminum reference tag on 8-in. oak tree; in concrete cylinder flush with surface of ground; NCGS standard traverse disk stamped "DOUGLAS 1970" (Photo 4-99)	453.277
1	21	10.90	U.E., in centerline of crossroads; copper nail and washer (Photo 4-97)	457.71

NGVD 29  
Elevations